



# User manual

## Rear VCT-14 clamping block

Version 1.0.0



[www.vocas.com](http://www.vocas.com)

## Index:

Introduction .....	3
Guide to Components: .....	4
Mounting & Adjustability: .....	5
Additional information .....	7
Contact data:.....	8

# Introduction


Thank you for purchasing a Vocas product. You are now the owner of a revolutionary Universal Base plate! More than 25 years of experience are part of Universal Base plate 'design and functionality.

We believe that the Vocas Universal Base plate gives you the perfect configuration for your camera. You will now experience having your camera in perfect balance. This VCT-14 clamping block can be used on a USBP 15F plate (0350-2001) when it is used together with the V-lock base plate (0350-2041).

Before you start to use your new accessory, please read these instructions carefully to enjoy optimum performance and a longer service life. Keep this manual in a safe place for future reference.

In the interest of continually improving products, Vocas Systems B.V. reserves the right to update or modify information contained in this manual.

## Guide to Components:

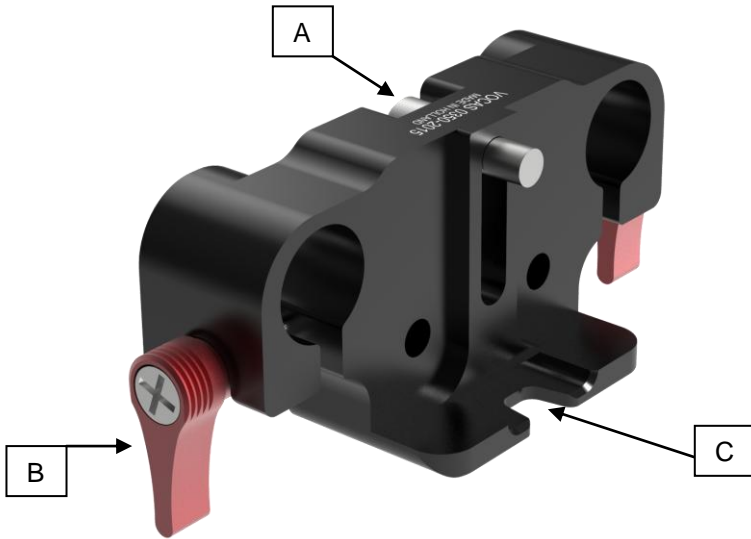

A:  
This M5 screw locks the clamping block to the rear of the USBP-15F, loosen to adjust the clamping block in height.

B:  
Two ratcheting winged nuts for clamping the 15 mm rods.

C:  
This wedge grips the 'mushroom' at rear of the VCT-14 plate.

## Mounting & Adjustability:



A: First adjust the 15 mm rails to the proper height.


*This height depends on the height of the used camera, please see the user manual of the USBP on how to adjust this.*

B: Make sure the V-lock base plate 0350-2041 is attached to the bottom of the USBP-15F.

C: Attach the rear VCT-14 clamping block to the USBP plate using the M5 screw.

*Don't tighten it all the way so the VCT-14 clamping block still can be adjusted.*

D: Make sure the VCT-14 clamping block is now resting on a flat surface and tighten the M5 screw. The bottom of the V-lock plate should line up with the bottom of the VCT-14 Clamping block as shown in the image below.

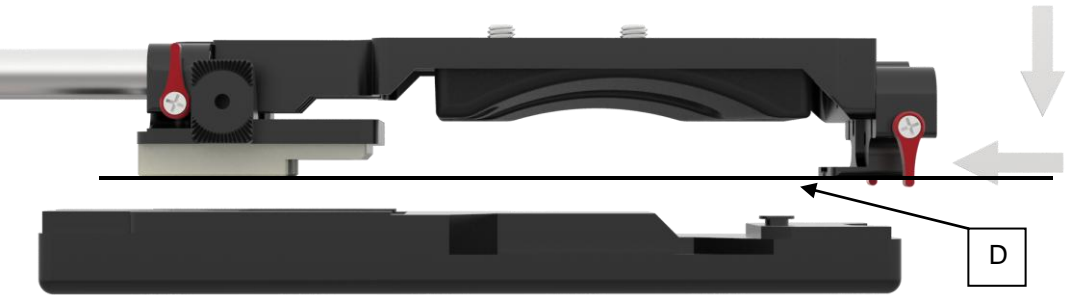

Double check: now try the base plate on a VCT-14 tripod plate, make sure the front of the base plate attaches correctly, and the wedge of the VCT-14 Clamping block grips the mushroom (at the rear) correctly.

## **Additional information**

Please note that Vocas cannot be held responsible for any damage caused by incorrect use of this accessory.

## Contact data:

Vocas Systems B.V.  
Larenseweg 121  
1221 CL Hilversum, The Netherlands  
T:+31(0)35-6233707 F:+31(0)35-6233997  
[www.vocas.com](http://www.vocas.com)